


# DOUBLE ENDED LAMP INSTALLATION

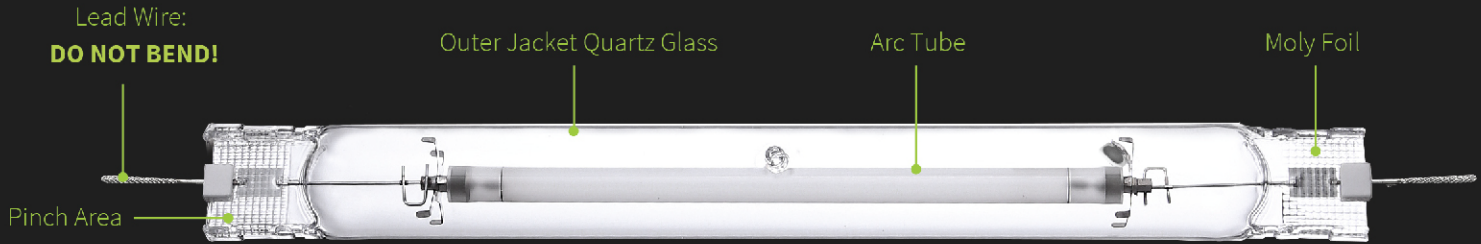

## STEP 1

Put on glove.

Wear safety glasses during installation.




### Step 1:

**IMPORTANT: PUT ON GLOVE.**  
DO NOT TOUCH THE LAMP WITH BARE HANDS. The outer jacket is made of quartz glass and cannot be touched like regular lamps. This weakens the glass and can cause lamp failure over time.

## STEP 2

Insert lead wires between slots.

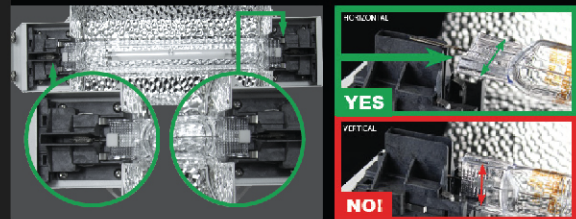


### Step 2:

Install the lamp by positioning the "Pinch Area" horizontally (NOT vertically) while inserting the "Lead Wires" between the slots in each socket. **DO NOT BEND THE WIRES!**

## STEP 3

Secure lamp into position.

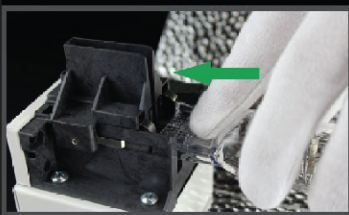


### Step 3:

Gently push outward the "Pinch Area" to the silver socket springs until it is securely in place.  
**CAUTION:** Do not push too hard as you may break or chip the glass which can cause lamp failure.

## STEP 4

Lock lamp into place.

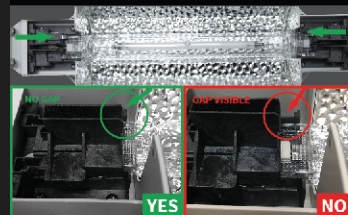

### Step 4:

Very forcefully slide each socket inward, all the way, until it clicks into place - making sure it is fully closed with no gap visible.  
**CAUTION:** Failure to completely close and lock sockets in place can cause arcing in the socket and fire damage.

### NOTIFICATION:

1. DO NOT test the fixture without lamp installed.
2. The lamp cord between reflector and ballast should NOT be extended.
3. Double check the sockets locking position by flashlight is strongly recommended.